

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING
A FILING UNDER 35 U.S.C. 371**

381NP/50868

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

10/048067INTERNATIONAL APPLICATION NO.
PCT/JP99/04060INTERNATIONAL FILING DATE
28 July 1999

PRIORITY DATE CLAIMED

TITLE OF INVENTION

METHOD AND APPARATUS FOR CONTROLLING MOTOR-DRIVEN THROTTLE VALVE, AUTOMOBILE, METHOD OF MEASURING TEMPERATURE OF MOTOR FOR DRIVING AUTOMOTIVE THROTTLE VALVE, AND METHOD OF MEASURING MOTOR TEMPERATURE

APPLICANT(S) FOR DO/EO/US

HOSHINO, Masatoshi; MARUMOTO, Katsuji; OOSUGA, Minoru; KAMIMURA, Yasuhiro; and SASAKI, Yasushi

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
 3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
 4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
 5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
 6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
 7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
 8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (executed).
 10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Item 11. to 16. Below concern other document(s) or information included:
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
 14. ☐ A substitute specification.
 15. ☐ A change of power of attorney and/or address letter.
 16. ☒ Other items or information:


Copies of: (1) First page of Int'l pub. no. WO 01/07768; (2) Request Form, PCT/RO/101 (5 pages); (3) International Search Report; (4) International Preliminary Examination Report; (5) Form PCT/IB/301; and (6) Form PCT/IPEA/401 (5 pages)



23911

PATENT TRADEMARK OFFICE

JC13 Rec'd PCT/PTO 28 JAN 2002

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/048067		INTERNATIONAL APPLICATION NO. PCT/JP99/04860		ATTORNEY'S DOCKET NUMBER 381NP/50868	
17. [X] The following fees are submitted:				CALCULATIONS	PTO USE ONLY
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 890.00					
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 Months from the earliest claimed priority date (37 CFR 1.492(e)). \$0					
Claims	Number Filed	Number Extra	Rate		
Total Claims	29-20=	9	X \$18.00	\$162.00	
Independent Claims	22-3=	19	X \$84.00	\$1596.00	
Multiple dependent claims(s) (if applicable)			+ \$280.00	\$ 0	
TOTAL OF ABOVE CALCULATIONS =				\$2,648.00	
Reduction by ½ for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$ 0	
SUBTOTAL =				\$2,648.00	
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$ 0	
TOTAL NATIONAL FEE =				\$2,648.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28,3.31). \$40.00 per property +				\$40.00	
TOTAL FEE ENCLOSED =				\$2,648.00 and \$40.00	
				Amount to be refunded \$	
				charged \$	
a. [X] Two checks in the amount of \$2,648.00 and \$40.00 to cover the above fees are enclosed. b. [] Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [X] The Commissioner is hereby authorized to charge any additional fees, which may be required, or credit any overpayment to Deposit Account No. <u>05-1323</u> (381NP/50868). A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive 37 CFR 1.437(a) or (b) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: CROWELL & MORING, LLP P. O. Box 14300 Washington, D.C. 20044 Tel. No. (202) 628-8800 Fax No. (202) 628-8844				SIGNATURE  Richard R. Diekendorf NAME 32,390 REGISTRATION NUMBER January 28, 2002 DATE	

DESCRIPTION

METHOD AND APPARATUS FOR CONTROLLING MOTOR-DRIVEN THROTTLE
VALVE, AUTOMOBILE, METHOD OF MEASURING TEMPERATURE OF MOTOR FOR
DRIVING AUTOMOTIVE THROTTLE VALVE, AND METHOD OF MEASURING
 5 MOTOR TEMPERATURE

TECHNICAL FIELD

The present invention relates to a motor-driven throttle
 valve controller for an automobile in which the opening of the
 10 throttle valve is controlled by the motor and a control method
 thereof, and also relates to an automobile having the
 motor-driven throttle valve controller and a method of
 measuring the temperature of the motor used for such an
 automobile.

BACKGROUND ART

In the motor-driven throttle valve controller described
 in the Japanese Patent Application Laid-Open No. 9-317538, the
 overshoot and the delay of the attainment time to the target
 20 opening are improved by comparing the rate of change of the
 opening of the throttle valve with the standard rate of change,
 determining whether it is in the overshoot cause area or in the
 settling delay area, and correcting the control gain of each
 term (proportion term, integration term, and differentiation

term) of PID in the control duty arithmetic expression for controlling the opening even if there is the change in the environmental temperature.

Further, in the Japanese Patent Application Laid-Open
5 No.8-303285, the feedback control is done to decrease the deviation between the electric currents by detecting the electric current which flows to the direct current motor for driving the throttle valve, and comparing the current value with the target current value of the motor. The overshoot and the
10 delay of the attainment time to the target opening can be cancelled to some degree in such prior art. However, the standard rate of change to judge whether it is in the overshoot cause area or in the settling delay area is different according to an individual motor in the former case. Further, this is
15 different according to the control characteristic of the throttle opening control.

Therefore, it is necessary to determine the standard rate of change peculiar to each product, and work is bad.

A concrete solution is not described though there is the
20 description with the idea of the addition of the correction to the control of the DC motor according to the change in an environmental temperature by measuring the change in an environmental temperature by the temperature sensor.

Further, the mechanical response delay of the motor might

cause the hunting of control system in the latter case.

DISCLOSURE OF INVENTION

An object of the present invention is to delete an
5 undesirable influence on various physical values caused by the
temperature change in a motor for driving a throttle valve
without causing a secondary problem and by using an easy method.
There is a throttle valve opening as one of the physical values.

Further, the engine speed and the intake air amount of
10 the automobile are one in the physical value.

Further, the present invention provides the technology
to measure electrically the temperature of the motor, too.

The compensator for compensating the supply capability
to the motor by detecting the change in the temperature and the
15 impedance of the winding of said motor is provided in the present
invention from this respect.

Further, in the present invention, the throttle valve is
fixed to the opening when control parameter for determining the
supply capability to the motor is maintained to a constant value.
20 The rate of change of the supply electric current and the applied
voltage to the motor with respect to time when the accelerator
pedal is stepped down under such a condition is different
depending on the temperature of the motor.

Further, when a specific value is given as a throttle

opening control instruction signal with feedback by the output of the throttle opening sensor invalidated, the specific value of the control instruction signal is different according to the temperature condition of the motor in the present invention.

5 Further, in the present invention, the compensator for compensating the supply capability to motor is provided so that the opening of the throttle valve should not change even if the temperature of the motor and/or the impedance of the winding of the motor change.

10 Further, the present invention provides the automobile in which the engine speed does not change even if the temperature of the motor and/or the impedance of the winding of the motor change.

15 Further, the present invention provides the automobile in which the measurement value of an air flow sensor of the engine does not change even if the temperature of the motor and/or the impedance of the winding of the motor change.

20 In the present invention, because the amount of supply capability to the motor is corrected by measuring the temperature of the motor, it is not required to perform special work to obtain the peculiar value of the reference value etc. even though the control which corresponds to an individual motor is possible.

In another invention, it is possible to measure the

temperature of the motor without using the sensor.

Further, in a further invention, the engine speed of the automobile and the detection value of the intake air amount never become unstable by the change in the temperature of the throttle valve driving motor.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the configuration of the present invention.

Fig. 2 is a graph showing schematically the response waveform to the target opening of the throttle valve.

Fig. 3 is a view showing the relationship between the temperature and the wire-wound resistor of the motor.

Fig. 4 is a graph showing the throttle valve and the motor electric current at the time the fuel is cut during deceleration.

Fig. 5 is a view showing a detector applied to the drive circuit to measure the motor electric current easily.

Fig. 6 is a graph showing schematically the relationship between the electric potential in each point of the drive circuit and the PWM signal.

Fig. 7 is a flow chart where the processing to obtain the temperature at the time the fuel is cut during deceleration.

Fig. 8 is a view showing an electric current detector using

the diode and its characteristic.

Fig. 9 is a view showing an electric current detector using the thermistor and its characteristic.

Fig. 10 is a view showing the configuration of the throttle actuator and control unit of the separate type.

Fig. 11 is a view showing the configuration of the throttle actuator and control unit of the integrated type.

Fig. 12 is a block diagram of the method of estimating the temperature based on the signal from the engine control unit.

Fig. 13 is a concrete circuit diagram of another embodiment of the present invention.

Fig. 14 is a view showing in detail another example of a method of detecting an electric current.

Fig. 15 is a timing chart to explain the electric current detection.

BEST MODE FOR CARRYING OUT THE INVENTION

Control system by which the signal which drives the motor is calculated at a fixed cycle based on the opening of the throttle valve detected by the opening sensor and the given target value is necessary to control the opening of the throttle valve to the given value. A nonlinear PID control is widely used as an easy control system now. In the PID control, the deviation

(difference between the opening and the target value), its integral values, and its differentiated value are obtained at a fixed timing with respect to the opening of the throttle valve detected by the opening sensor and the given target value.

5 Further, each value is multiplied by a suitable constant (hereafter, it is referred as the PID gain), and the motor is driven by using the sum of the products.

However, because the dynamic characteristic of the throttle valve is nonlinear, the friction of the axis
10 circumferences of the motor and the valve greatly influences when the valve is moved finely to control the engine speed at the idling constantly for instance. Therefore, the steady-state deviation remains and the response of the valve opening to the target value deteriorates. Then, the PID gain is dynamically
15 switched in proportion to the magnitude of deviation in order to cope with the nonlinear of the electronically controlled throttle as the controlled system. The gain to be switched is stored in the memory area which is called a map beforehand, and the gain corresponding to the occasional deviation is retrieved
20 from the map to use as the PID gain. The PID gain to be stored can be roughly calculated from the simulation and the specification such as motors and gears of the drive system of the valve. However, to meet the demand of the response for the target value, the PID gain is often fine adjusted based on the

experiment.

The demand for the response to the target value of the throttle valve opening has the response time, the transition characteristic and the resolution. Response time should be assumed to be a value without the sense of incompatibility for driver's accelerator operation. Further, a lot of throttle valves are the butterfly valves. The position of full-open and full-close of the valve is determined by the deceleration gear's coming in contact with a stopper physical, or the throttle valve's coming in contact with the wall of the intake pipe, and thus the movable range of the valve is limited to about 90 degrees. At this time, an abnormal impact is applied to the valve and the gear and thus they will be in danger of damage when the target value of opening momentarily changes from the almost full-close into the full-open for instance, and the valve overshoots. It is necessary not to generate a transitional overshoot meeting the demand on the response time as the response of the throttle valve. Further, when the control of the engine speed at the idling is controlled not by the amount of the by-pass air flow which flows through the passage where the throttle valve is bypassed, but by the electronically controlled throttle, the resolution of the throttle valve opening of 0.1 degrees or less is needed for instance.

On the other hand, the temperature of the electronically

controlled throttle set up in the engine room has the possibility to change from -40°C to about 120°C for instance according to the temperature of the ambient air and the operating state of the engine. Therefore, the above-mentioned

5 demand of the response time, the transition characteristic and the resolution should be satisfied in this wide temperature range. In general, the resistance between terminals becomes large as the temperature of the winding of the motor goes up, and the torque constant becomes small. Further, the viscosity
10 resistance becomes small with the temperature of the winding rises in the axis of rotation in which the lubricant is enclosed. The above-mentioned character reverses when the temperature falls. This friction cannot be disregarded in the control of an electronically controlled throttle though it is difficult
15 to know a general temperature characteristic about static or dynamic friction which relates to the resolution when the throttle valve is controlled.

Thus, because the characteristic of drive system of the throttle valve changes depending on the temperature, it is
20 essentially difficult in the conventional map method in which the PID gain is switched according to the deviation to meet the demand for the valve operation in wide temperature range. Further, when trying to meet the requirement specification by enlarging the magnitude of the map, and increasing the number

of the PID gain to be switched, a large amount of ROM area is needed in control unit. Further, because the temperature with the largest influence cannot be considered, it is difficult to secure the control performance. The gain is fine adjusted in consideration of the response of the valve under the management of the temperature of the electronically controlled throttle by using the thermostatic oven to determine the map of the PID gain experimentally. In this method, the repetition of the gain adjustment and the temperature change is necessary, the time required to change the temperature is long, and a large man-hour will be required up to obtain the best PID.

The above-mentioned problem is solved by detecting the atmosphere temperature by which a big influence is applied on the response of the throttle valve by using an easy method, and switching the PID gain according to the detected temperature in this embodiment.

In this embodiment, the following technologies are proposed.

The temperature of the throttle and the motor is measured, and the signal for said throttle valve opening and shutting control is corrected by using the measured temperature in the electronically controlled throttle controller for driving the motor for the throttle valve opening and shutting control based on the opening instruction signal of the throttle valve and the

output of the sensor for detecting the opening of the throttle valve.

Further, when a specific value is given as said instruction signal with the feedback by the output of the throttle opening sensor invalidated, said control signal is changed by the temperature condition of the motor.

Further, this embodiment comprises a means for measuring the electric current which flows to the motor. The atmosphere temperature of said motor is estimated based on the electric current by said measurement means and the voltage applied to the motor when the opening of the throttle valve within the fixed time range is in a fixed range.

Embodiments of the present invention will be explained more in detail with reference to the drawing.

Fig. 1 is a block diagram showing one example of the configuration in which the opening of the electronically controlled throttle valve is controlled according to the method of the present invention. An electronically controlled throttle is a device to drive throttle valve 10 comprised of a butterfly valve for adjusting the air flow rate which flows to intake pipe 6 by using DC motor 7 through deceleration gear 8. As a mechanical fail safe mechanism which prevents the reckless driving of the automobile, the valve is returned to the predetermined opening by return spring 9 mounted on the axis of rotation of the valve

when motor 7 does not generate the torque, for example, at the discontinuation of the control of the throttle valve. The predetermined opening is set for the automobile to self-propell at a little higher engine speed than the idling. Drive circuit

5 5 of motor 7 comprises with an H bridge circuit which consists of four power IC. When the duty ratio is given, drive circuit 5 generates the corresponding PWM (pulse width modulator) power signal. The actual opening of throttle valve 10 is measured by opening sensor 11 (potentiometer) mounted on the axis. The noise

10 of the output of opening sensor 11 is removed through low pass filter LPF 12, and then the output is taken into microcomputer 15 by AD converter 13. The target opening of throttle valve 10 is given by the signal from accelerator 2 taken into the engine control unit (ECU) 1 and the signal indicative of the various

15 operating state of the engines. In PID control system achieved by using the software in microcomputer 15, the difference (deviation) between target opening T_{vc} and actual opening T_{vo} may decrease, that is, the duty ratio of the PWM signal is calculated so that both can be promptly matched. And, drive

20 circuit 5 drives the motor according to the calculated duty ratio. Proportional gain K_P , integration gain K_I , and differentiation gain K_D which are gains of the PID control system are recorded in map 4 as shown in Fig. 1(b), and these gains are changed depending on the magnitude of deviation. This

is to cope with the nonlinear characteristic of physical value including the friction included in electronically controlled throttle. For instance, time until settling to the target opening increases because the speed of the valve slows and the influence of friction increases when the opening of the valve approaches the target value. The response time is set not to become long by enlarging KI which affects settling when the deviation is small. The map of the PID gains is made repeating the experiment by a real machine based on calculated value by the simulation. However, the change takes place in the viscosity of the grease of the bearing and the impedance of the winding of the motor when the atmosphere temperature rises, in case that the map is made by this method, and it is set so that the response of a preferable valve as shown in Fig. 2 can be obtained at normal temperature. Therefore, the transition characteristic of the PID gain provided at normal temperature might deteriorate. Then, the PID gain is changed by not only deviation but also the temperature as shown in Fig. 1 (c) by providing thermometry control means 14. Thermometry control means 14 inputs signals from engine control unit 1 and drive circuit 5, and switches the PID gain by using the temperature of the motor obtained by the calculation based on Fig. 1(c). Further, thermometry control means 14 switches the signal input to drive circuit 5, and selects either of a feedback control signal (PWM signal)

based on output Tvo of opening sensor 11 or an open loop control signal Ft generated in thermometry control means 14 itself.

Five methods of achieving the thermometry control means for measuring the atmosphere temperature of the electronically controlled throttle will be concretely described as follows. Two methods, a method of estimating the temperature by obtaining the value of wire-wound resistor of the motor from the voltage and the electric current applied to the motor, and a method of measuring the temperature directly by a brief temperature sensor will be explained. Further, two methods of obtaining the temperature based on the signal from the engine control unit will be described.

The method of measuring (estimating) the temperature from wire-wound resistor of motor 7 will be explained hereinafter.

It is necessary to obtain the value of resistance with the fixed accuracy in order to obtain the resistance from the ratio of the voltage and the electric current, and to obtain the temperature from the value of this resistance. Therefore, when the motor is stopped, it is necessary to provide a fairly big electric current stabilizing. When the motor is rotating, accurate electric resistance cannot be obtained according to the ratio of the voltage and the electric current because counter-electromotive force is generated. Further, it is difficult to measure contact resistance accurately though the

resistance of the motor is the sum of the contact resistance the brush and the wirewound resistor, etc. Especially, when the motor is rotating or the applied voltage is small, the measurement error increases. It is preferable to apply a big voltage to reduce these influences when the motor is stopped and to obtain the resistance at that time. However, such a condition does not satisfied when the feedback control is done detecting the actual opening of the throttle valve as shown in Fig. 1. Then, when the temperature is obtained, the feedback control is stopped, and throttle valve 10 is fixed to full-close position by providing PWM signal F_t of a constant duty ratio from thermometry means 14 directly to drive circuit 5 in the open loop based on the signal from engine control unit 1 and the signal from drive circuit 5. Thermometry means 14 obtains the temperature of the motor 7 for driving the throttle valve as wire-wound resistor (impedance) of motor 7 by using the relationship between the resistance of the average applied voltage and the electric current at this time, and the relationship between the resistance and the temperatures shown in Fig. 3.

When the driver completely closes the accelerator to improve fuel cost in a recent automobile and decelerates, the deceleration fuel cut mode in which the fuel is not injected is generally adopted. At this time, it is not necessary to

perform especially the feedback control because throttle valve 10 is also fully closed as shown in Fig. 4. When the feedback control is done to prevent the collision to the intake pipe wall, etc. by the overshoot in the motor-driven throttle valve controller, the full-close position to be controlled in the target opening instruction is set at the position which opened more slightly than the mechanical full-close position (the position which comes in contact with the intake pipe wall and stopper). Anyway, the feedback control of Fig. 1 is stopped at the fuel cut when decelerating, and PWM signal Ft of a constant duty ratio is applied from thermometry means 14 to drive circuit 5 in this embodiment. The magnitude of the duty ratio is assumed 50% for instance, which resists the torque of the return spring by the feedback control, and which control the opening in the mechanical full-close position exceeding full-close position in the control. As a result, throttle valve 10 is pressed to the mechanical full-close position, and the current larger than one at the feedback control comes to flow into motor 7. As for the processing for this temperature estimation, time when the fuel is cut when decelerating is preferable. The driving characteristic is not negatively affected because at that time, throttle valve 7 is originally in the fully closed state. Further, the control to the above-mentioned full-close position does not exert the influence on the durability of the throttle

valve controller because the full-close learning is carried out, that is, throttle valve 7 is pressed against the full-close position by adding a constant duty ratio immediately before the engine is started and the engine are stopped, in order to confirm

5 the physical full-close position in a lot of motor-driven throttle controllers. Further, it is also possible to measure the temperature pressing the throttle valve against the full-close position within the range where there is no influence in the driving characteristic by a similar method when the

10 throttle valve is open greatly and frequently like the engine of cylinder injection of fuel.

One example of the circuit for measuring the electric current which flows to the motor is shown in Fig. 5. Fig. 5 shows the configuration in which detection resistance R is applied

15 to drive circuit 50 which uses the H bridge which consists of power transistor T1, T2, T3, and T4, and resistance with few changes in resistance according to the temperature is chosen as the detection resistance R. The voltage to be applied to motor

7 obtained by PID control system 51 is converted into the PWM

20 signal and the rotation direction signals (SW1, SW2) by PWM generation circuit 52. The PWM signal is input to power transistor T1 and T2, and rotation direction signal SW1 and SW2 are applied to power transistor T3 and T4.

If this circuit is used, the motor can be controlled in

PWM by battery 54 including the rotation direction. Because the noise by the switching of power transistor is superimposed to the voltage at both ends of the detection resistance, A/D conversion of this voltage is performed after passing low-pass
5 filter 55. Further, the both ends voltage is input to AD converter 57 through amplifier 56 because it is smaller than voltage average (TTL) of the AD converter built into a general microcomputer. The electric current which flows to the motor can be obtained from the resistance of detection resistance R
10 and the voltage in C point of Fig. 5 measured here. There is the one to use the circuit like Fig. 5 to use for the self-diagnosis and the control in the electronically controlled throttle originally. The circuit can be used in common in that case, and it is unnecessary to change the hardware. Even when
15 detection element is newly applied, the change of the circuit and the increase of the cost are little.

In the drive circuit of Fig. 5, the relationship of the voltage at each point of A, B and C and the PWM signal becomes like Fig. 6. However, power transistor T3 must be turned off,
20 T4 on, and the electric current must flow in order of A, B, and C. Further, an ideal case is shown in Fig. 6 though the switching of power transistor actually influences. The voltage at A point rises most due to the resistor of the winding of the motor, the "on" resistance of power transistor T4 and the detection

resistance. It is the best to measure the voltage between terminals of detection resistance R in which the resistance is almost not changed due to the temperature at C point because the resistance of the winding of the motor and the power transistor change in their magnitude depending on the temperature.

When the above-mentioned hardware is prepared, the flow chart of the processing of the software of the temperature detection is shown in Fig. 7. Because this processing estimates the temperature at the fuel cut, the cycle of processing is enough at the cycle when it is judged whether the engine control unit electronic control unit does the fuel cut. For instance, the undermentioned processing is repeated every 10 ms in this case. In step 71, communication with the engine control unit ECU is established, and whether the fuel cut when decelerating is done and whether the opening of the accelerator pedal is fully closed are confirmed. If either one is "NO", then this processing is ended. At this time, in the open loop control in which the feedback control has not already been done, the opening of the throttle valve is controlled to match to the target opening instruction value after returning to the usual feedback control. Whether it is within five minutes from the last thermometry processing is checked in step 72 after it is confirmed that the fuel is cut and the accelerator pedal are

fully closed in the above-mentioned step 71. Accuracy is not improved even if the data taken after a lapse of five minutes or more is averaged because the current value measured by detection resistance R added to drive circuit 50 in this
5 processing should be averaged. When it is away by five minutes or more from execution time of last time or does thermometry for the first time, the feedback control is stopped and a rotation direction signal and constant PWM control signal F_t are input to drive circuit 53 to press throttle valve 10 against
10 full-close position in step 77. Step 78 is the initialization of the averaging processing. In step 73, the electric current which flows to the winding of motor 7 is obtained based on the map indicative of the correction of a nonlinear characteristic of the detector by using the both ends voltage of detection
15 resistance R converted from analog to digital. In step 74 and 75, the electric current which flows to motor 7 is integrated till it reaches constant N. The winding resistance of the motor is obtained from the duty ratio of the applied PWM control signal F_t by averaging the current value in step 74 after the data of
20 Npiece is integrated. Further, the temperature is obtained from the map etc. in which the relationship between the resistance of the winding including copper as the major component and the temperature is described.

Next, two methods of composing the circuit for detecting

the temperature will be described. One is a method in which the diode is used, and the other is a method with thermistor. It is possible to measure the temperature regardless of the operating state of the engine though the hardware for the temperature detection is added in these methods. Therefore, the software for the temperature detection becomes brief compared with the method using the above-mentioned fuel cut. The temperature is obtained at a suitable cycle in consideration of the heat mass of the throttle, and the PID gain is corrected based on the temperature. Concretely, the map where the gain is described for instance is switched.

The configuration of the temperature detector which uses the resistance of the forward direction of the diode is shown in Fig. 8(a). A constant electric current is thrown from the battery into diode D by using constant-current circuit 81. If the electric current is constantly controlled, voltage VD applied to diode D has the characteristic like Fig. 8(b), for instance, for the temperature, although voltage VD applied to diode D is different according to the electric current. Because dynamic range for the AD converter built in microcomputer is narrow yet, the accuracy cannot be secured. Then, the amplifier which uses analog amplifier 82 is composed, and the characteristic of the voltage VD applied to the diode is converted into that of voltage V0 suitable for the A/D

conversion shown in Fig. 8(c). The temperature can be obtained by converting from analog to digital and processing using Fig. 8(b).

Fig. 9(a) shows the temperature detector which uses thermistor T. Because the temperature characteristic the resistance of thermistor T has a strong nonlinear as shown in Fig. 9(b), normal resistance R6 is connected in parallel. The change in potential is small in the range of the temperature change occurred in the motor-driven throttle valve controller as well as the temperature detection which uses the above-mentioned diode, although the potential of A and B of bridge circuit (R5-R8) changes in proportion to the temperature. Then, the amplifier is made with analog amplifier 91, and output voltage V0 is converted in A/D. Because the relationship of output voltage V0 of the analog amplifier and the temperature is like Fig. 9(c), the temperature is obtained from this characteristic.

Although the motor-driven throttle valve controller comprises the control unit and the actuator which consists of the motor and the gear, the separate type in which both is separated like Fig. 10 and the integrated type like Fig. 11 etc. are thought. In the separate type configuration, control unit 101 is often put in the car interior. Therefore, the difference in temperature between control unit 101 and actuator 102 which

is put in the engine room becomes large. Accordingly, it is preferable to use the method utilizing that the throttle valve becomes full-close at the fuel cut when decelerating in the separate type. The diode and the thermistor are provided to the

5 actuator (housing of the motor or the throttle) in case of the use of the temperature detector. On the other hand, because of both the actuator and control unit in the engine room in the configuration of the integrated type shown in Fig. 11, the temperature of them becomes almost the same. Therefore, it is

10 possible to mount the temperature detector on the substrate of control unit even when it is used. Naturally, the method of synchronizing with the fuel cut when decelerating without changing the circuit for the integrated type is also possible. In this case, it is suitable to receive the signal of the

15 deceleration and the fuel cut from the electronic control unit according to the communication.

It is also possible to obtain the atmosphere temperature of the throttle approximately by using the signal in engine control unit 121. The temperature of the intake air can be

20 calculated based on the state equation of the gas by passing the information on the intake air amount and the intake pipe pressure from the engine control unit to throttle control unit 122, in the engine in which intake air amount sensor 123 and pressure sensor 124 are installed in the intake pipe to control

the engine. Of course, it is also possible to provide the temperature sensor which measures the temperature of the intake air directly. Anyway, the atmosphere temperature of the throttle can be obtained in the approximate value by making a

5 suitable correction by using the map etc. though the temperature of the intake air is often lower than that of the motor of an electronically controlled throttle. Further, because the temperature of cooling water is measured by the temperature sensor in most engines for automobiles, the method of

10 substituting the temperature of the motor at the water temperature is devised. In this case, accuracy improves if a suitable correction is made because the temperature of water is usually lower. Because the calorie generated by the engine and the air temperature remarkably influences on the atmosphere

15 temperature of the motor-driven throttle valve controller, the amount of the fuel injected from injector 125 and the engine speed detected by rotation sensor 126 is used as a correction method. It is judged that the calorie generated by the engine is large when the engine speed and the amount of the fuel are

20 large during the constant period. The temperatures of the intake air and cooling water are corrected to higher temperatures, and it is used as the temperature of the motor for driving the throttle valve. This relationship is settled experimentally and used in the map at the software implementation and used. For

the control of the PID gain, The temperature compensation can be made without the problem on practical use even if the number of sheets of the map is a little when composing to select which map to be used, based on the temperature put together to three
5 maps with the detected temperature range of the motor shown in Fig. 1, for instance, from -40° to 10° , 110° or less, from 10° to 80° and 80° or more.

According to the above-mentioned embodiment, the response of the throttle valve hardly changes even if there is
10 a temperature change by the operating state of the engine because the gain of PID control system is corrected by measuring the atmosphere temperature which remarkably influences on the response of the throttle valve in the motor-driven throttle valve controller. Further, in the prior art, the gain has been
15 switched according to the difference between the target opening and the actual opening. However, it is possible to reduce the map in which the gain is recorded can be reduced because the gain is controlled according to the temperature which influences directly. Further, it is possible to shorten the
20 making time of the map which has required a large man-hour.

Fig. 13 is a block diagram of the control system of the electronic throttle controller according to one embodiment of the present invention.

Target opening signal T_{vc} of the throttle valve which

instructs the target opening of the throttle valve is input to an A/D input terminal of microcomputer 1, and converted into the digital signal by the A/D converter installed in microcomputer 1.

5 Target opening signal TVC of the throttle valve is an analog signal to which the control amount of the accelerator pedal detected by the accelerator pedal sensor.

Of course, it is possible to obtain target opening signal Tvc of the throttle valve as a digital signal by retrieving the analog signal indicative of the control amount of the accelerator pedal detected by the accelerator pedal sensor to the microcomputer of the engine control unit ECU, and retrieving by the map or carrying out the operation which includes other various physical values (the engine speed, the intake air amount, 10 the vehicle speed, and the voltage of the battery, the magnitude and the presence or absence of the electric load such as air conditioners and lamps, etc.) in the microcomputer of the engine control unit ECU. It is unnecessary to carry out the A/D conversion in microcomputer 1.

20 The data signal indicative of the duty ratio like T_b/T_a , for example, can be given as a digital signal of target opening signal Tvc of the throttle valve, assuming that the cycle of PWM signal is T_a and the length of "ON" pulse is T_b .

The opening of throttle valve 10 installed in throttle

body 2 rotatably is detected by potentiometer 11 united with the axis of throttle valve 10. The opening of throttle valve 10 detected by potentiometer 11 are amplified by amplifier 3 as actual opening signal T_{VF} of the throttle valve, input to the A/D input of microcomputer 1, and converted to a digital signal by the A/D converter built in microcomputer 1.

Microcomputer 1 outputs control signal PWM and D/O to PWM drive circuit 8 based on input target opening signal T_{VC} of the throttle valve and actual opening signal T_{VF} of the throttle valve.

Control signal PWM is a pulse signal. The cycle of the pulse is constant, and the duty ratio of the pulse is changeable.

The duty ratio of the pulse is calculated in microcomputer 1 so that it may increase as the difference between target opening signal T_{VC} of the throttle valve and the actual opening signal T_{VF} of the throttle valve.

Control signal D/O is a control signal of two bits indicative of four states of the rotation direction of motor 9, "Normal rotation", "Reversal" and "Stop" of motor 9, and "braking".

PWM drive circuit 8 outputs control signal PWM as control signal PWM1 and outputs control signal F indicative of the direction of the normal rotation at "Normal rotation" according to "Normal rotation" or "Reversal" indicative of the rotation

direction of motor 9 among input control signal PWM and D/O. Control signal F is a signal which always turns on at the normal rotation.

Further, control signal PWM is output as control signal
5 PWM2 at "Reversal", and control signal R indicative of the direction of the reversal is output. Control signal R is a signal which turns on when reversing.

H bridge type chopper 4 to which the control signal is supplied from PWM drive circuit 8 comprises of power MOSFETs
10 M1, M2 for the PWM control, and power MOSFET M3, M4 for the rotation direction switch of the direct current motor.

Therefore, control signal PWM 1 and control signal F are output when control signal PWM is in a ON state and at the normal rotation, and power MOSFET M1 and power MOSFET M4 of H bridge
15 type chopper main circuit 4. Power-supply voltage VB from battery B is applied to motor 9 via power MOSFET M1, thereby motor electric current IF flows. Further, the current IF returns to battery B through power MOSFET M4 and shunt resistance 5.

Although power MOSFET M1 is turned off when control signal
20 PWM1 is turned off, power MOSFET M4 is still in an ON state because control signal F of the normal rotation is outputting. Therefore, motor electric current IF flows from power MOSFET M4 via a reverse-diode of power MOSFET M3, and flywheel current ID3 flows. Accordingly, motor electric current IF becomes

electric current IM1 which flows in power MOSFET M1 when control signal PWM1 is in the ON state, and it becomes flywheel electric current ID3 which flows in MOSFET M3. the power when control signal PWM1 is in OFF state.

5 Further, control signal PWM2 and control signal R are output when control signal PWM is turned on and at the reverse rotation, and power MOSFET M2 and power MOSFET M3 of H bridge type chopper main circuit 4 are turned on.

Power-supply voltage VB from battery B is applied to motor 9
10 via power MOSFET M2, and motor electric current IF flows. Further, it returns to battery B through power MOSFET M3 and shunt resistance 5. Power MOSFET M2 is turned off when control signal PWM2 is turned off, and the motor electric current IF flows from power MOSFET M3 via a reverse-diode of power MOSFET
15 M4. As a result, the flywheel electric current flows.

Thus, motor electric current IF flows to motor 9 in a direction opposite to that of normal rotation, and motor 9 can be reversed.

Motor 9 is a DC motor, but it is possible to use a stepping
20 motor. Motor 9 is connected to throttle valve 10 through the deceleration gear, and throttle valve 10 is opened by the normal rotation of motor 9 and it is closed by the reverse rotation of motor 9. That is, the opening of throttle valve 10 can be controlled.

Power device electric current I_D which flows in shunt resistance 5 will be described later in detail with reference to Fig. 15.

This power device electric current I_D is detected as shunt
5 resistance voltage drop V_D at both ends of shunt resistance 5, and is amplified by amplifier 6.

Because a part of shunt resistance 5 is at potential of the earth, and shunt resistance 5 is used for the electric current detection, which resistance is small.

10 Therefore, shunt resistance voltage V_D is low compared with the drive voltage of amplifier 6, for instance, 5 V, and not an electric current detector of an expensive insulation type, but a usual amplifier can be used.

Output voltage V_{DA} of this amplifier 6 is held in
15 sample-hold circuit 12 working in synchronization with control signal PWM output from microcomputer 1. Output voltage V_{DH} of sample-hold circuit 12 is input to the A/D input terminal of microcomputer 1, and converted into the digital signal by the AD converter built in microcomputer 1.

20 Power device electric current I_D detected thus is compared with the control signal of the motor current obtained from the difference between target opening signal TVC of throttle valve and actual opening signal TVF of throttle valve, and feedback control of the motor current is performed by

correcting the duty ratio of control signal PWM so that power device electric current ID can match the control signal of the motor electric current.

The throttle opening can fundamentally be controlled only
5 by the feedback control based on the difference between actual opening signal TVF of the throttle valve and its target opening signal TVC.

However, the electric current which flows in motor 9 will actually change because the impedance of motor 9 changes even
10 if other control parameters (the engine speed, the vehicle speed, the voltage of battery B, and the magnitude and the presence or absence of electric load, etc.) are constant, and control signal PWM output from microcomputer 1 is constant when the outside air temperature, the temperature of the motor and the
15 winding temperature of the motor change.

Namely, the electric current which flows to the motor decreases when the outside air temperature, the temperature of the motor and the winding temperature of the motor rise.

The outside air temperature, the temperature of the motor,
20 the winding temperature of the motor, the impedance of the motor (Obtained by calculation from the detected value of power device electric current I and the applied voltage), the temperature of the engine cooling water for cooling the motor, etc. are detected for the change in the motor electric current more than

the target opening instruction from the ECU (engine control unit). The throttle opening can be controlled with a high degree of accuracy by increasing control signal PWM output by microcomputer 1 so that the decrease of the motor electric current may be compensated when the electric current which flows in the motor decreases, and thus increasing the motor electric current.

Next, the circuit of the detection portion of power device electric current I is explained in detail with reference to Fig. 14 and Fig. 15. In Fig. 14, the same numerals designate the same parts as Fig. 13.

Power device electric current ID which flows to shunt resistor 5 connected to H bridge type chopper circuit 4 is taken into amplifier 6 as shunt resistor voltage VD.

Amplifier 6 comprises operational amplifier 61, input resistors R1, R2, feedback resistors R3, R4, and output resistor R5.

Output voltage VDA of amplifier 6 is input to sample-hold circuit 12.

Sample-hold circuit 12 comprises analog switch 121 and capacitor 122, in which analog switch 121 turns on or off in synchronization with the PWM signal from microcomputer 1.

When turning on, the output signal of amplifier 6 is output as it is. When turning off, the voltage charged to capacitor

122 immediately before being turned off is held.

Because control signal PWM output by microcomputer 1 and control signals PWM1, PWM2 output by PWM drive circuit are the same pulse signals,

5 It is possible to use control signals PWM1, PWM2 output by PWM drive circuit instead of control signal PWM output by microcomputer 1 as the signal which operates analog switch 121 in Fig. 13.

10 In that case, the signal which operates analog switch 121 can be obtained by taking logical add (OR) of control signal PWM1 and control signal PWM2.

15 Anyway, the power device electric current is sample-held by operating the analog switch based on the PWM signal which is finally the control signal of the power device of H bridge type chopper circuit.

Here, the principle of the electric current detection is explained based on each electric current and voltage waveform by using Fig. 15.

20 Fig. 15(A) shows control signal PWM from microcomputer 1, and control signals PWM1 and PWM2 output from PWM drive circuit 8 are similar signals.

Control signal PWM is a repetition pulse in which it turns on at time t_0 and turns off at time t_1 , then turns on at time t_3 and turns off at time t_4 .

Although this pulse cycle T_0 is constant, ON time T_1 of this pulse is variable. The duty ratio (T_1/T_0) of this pulse changes by changing ON time T_1 of the pulse according to the difference between actual opening signal TVF of throttle valve and throttle opening instruction TVC.

When a signal of 20kHz is used as PWM signal, cycle T_0 of the pulse is 50 μ s.

Fig. 15(B) shows power device electric current I_D , and when control signal PWM turns on, power device electric current I_D starts to flow.

At this time, the overcurrent flows by the influence of reverse-recovery (recovery) characteristic etc. of power MOSFET.

Further, when control signal PWM is turned off, the electric current becomes 0 behind time T_2 by the operation delay of power MOSFET. Delay time T_2 is about several μ s.

Fig. 15(C) shows shunt resistance voltage V_D at both ends of shunt resistance 5. When power device electric current I_D falls, some overshoots are generated by the influence of reactance L .

Fig. 15(D) shows output voltage V_{DA} of amplifier 5, and the voltage V_{DA} vibrates when rising at time t_0 by the high frequency property of the operational amplifier, and when falling at time t_2 , the time delay is caused. Such an effect

is caused because the PWM signal is a high frequency signal of 20kHz as mentioned above.

Sample-hold circuit 12 is used when this signal is taken into microcomputer 1 to remove the influence of various changes, because the output voltage of amplifier 6 is a voltage signal with waveform shown in Fig. 15(D). The timing of the sample holding is synchronization with time t_1 , t_4 , that is, the falling edge of PWM signal. When turning off analog switch 121 in sample-hold circuit, amplifier output voltage VDA immediately before that is held in capacitor 122..

In fact, the PWM signal is a pulse signal as shown in Fig. 15(A). Therefore, analog switch 121 is turned off when this pulse signal changes from "ON" to "OFF", and amplifier output voltage VDA immediately before that is held in capacitor 122.

Although electric current detection signal VDH which is an output of sample-hold circuit 12 is equal to output voltage VDA of the amplifier of Fig. 15(D) from time t_0 to time t_1 as shown in Fig. 15(E), it is equal to the voltage held immediately before t_1 after that time.

Further, the A/D taking of electric current detection signal VDH which is the output of sample-hold circuit 12 is begun as shown in Fig. 15 (F) synchronizing with the falling edge of the PWM signal by providing an external trigger to the A/D converter in microcomputer 1.

Thus, the difference of data due to the difference of timing is not generated by restricting the timing of the A/D conversion.

Although time t_3 from the start of this A/D conversion to the end is different depending on analog signal value to be converted, it is from several μs to tens of μs in this example.

When the A/D conversion ends, the converted digital signal is taken into the main body of microcomputer 1 as microcomputer data (IDCURNT) as shown in Fig. 15(G).

Fig. 15 (H) shows motor electric current IF which flows in motor 9. The electric current which flows between time t_0 and time t_1 corresponds to electric current IM1 which flows in power MOSFET M1 in Fig. 13 in this motor electric current Ir. The electric current which flows between time t_1 and time t_2 corresponds to flywheel electric current IM3 which flows in power MOSFET M3 in Fig. 13.

Therefore, because the current value immediately before the chopper circuit is turned off can be input, the current value not influenced by the vibration at the rising of the current etc. can be detected.

When PWM control is performed, the A/D taking can be performed in the middle of the ON period of the PWM signal by providing the trigger signal.

Namely, the A/D taking is started at the timing of time

(($t_1 - t_0$)/2) when the PWM signal is in an ON state from time t_0 to t_1 . Because the timing approaches the rising of the pulse when the duty ratio becomes small and the ON period of the pulse shortens, it will be influenced by the vibration at the time of the rising as shown in Fig. 15(D). However, this influence is omitted by providing an external trigger at the falling edge of the PWM signal and doing the A/D taking like this embodiment.

The effect of this invention can be confirmed by connecting the same degree of resistance as increment of the impedance of the winding by the temperature rise of the motor in the feeder circuit of the motor, and checking that the opening of the throttle valve do not change.

In the present invention, the temperature of the motor can indirectly be obtained by the calculation as an impedance of the winding according to the voltage applied and the electric current which flows in the motor.

Further, it is preferable to detect the current value when the throttle valve is controlled to be at the full-close position, for example, at the engine brake (At the fuel cut when decelerating) or the full-close learning, etc.

It is possible to measure the temperature of the motor by mounting the temperature sensor directly in the housing. It is also possible to regard the temperature of the engine cooling water as that of the motor when the temperature of the motor

is managed by the engine cooling water. Further, it is possible to substitute the temperature of atmosphere where the motor is put. Because the impedance of the winding of the motor is changed depending on the temperature, it is possible to detect this impedance.

The expression of "The opening of the throttle valve does not change", "The cycle of the engine does not change", "The output of the air amount sensor does not change", "Same opening", "same engine speed" and "Same air flow amount" in the present invention does not mean the change in the physical value is zero, or the difference of the physical value is not at all, but has the allowable width within the range which does not interfere to control, or the range which does not deviate from the object of the present invention.

Further, all of control parameters including the accelerator control amount are made constant, the throttle valve is made stationary at a specific opening. Next, the accelerator is depressed with the throttle valve being fixed so as not to move from its opening. At that time, the throttle valve controller increases the supply voltage to the motor because the target opening instruction value of the throttle valve increases. However, the difference between the target opening instruction value and the actual opening does not change because the throttle valve is fixed. The throttle valve

controller further increases the supply voltage to the motor due to the action of the integration term. Supply voltage will increase like the lamp in such a state. The change in time of the supply voltage is determined by the difference between target opening instruction value and the actual opening, and the gain of the throttle valve controller. If the difference between the target opening instruction value and the actual opening is maintained in a fixed value, the change in time of the supply voltage will be determined only by the gain of the throttle valve controller.

The operation of the above-mentioned is executed at normal temperature, and the change of the time of the supply voltage is recorded. Next, the ambient temperature is raised to 125°C, the difference between the target opening instruction value and the actual opening is set as well as the operation of normal temperature, a similar operation is executed, and the change in time of the supply voltage is recorded. Whether the gain of the throttle controller is changed depending on the temperature is determined by comparing the change in time of the supply voltage at this time with the one at the normal temperature.

Further, all control parameters are made constant by mounting the heater on the motor and the heater is heated.

The temperature of the motor is about to rise along with

the temperature rise of the heater, the impedance of the winding increases, and thus the electric current decreases. If the present invention is applied, the compensator works to make compensation for this electric current decrease at once.

5 Therefore, the supply capability of motor is compensated, and the opening is kept constant.

As a result, the air flowmeter outputs the detection value of the air flow amount which does not change. Further, engine speed maintains the same revolution number.

10 This operation can be used together with the technology that The actual opening of the throttle valve is detected, the values are compared with the target opening instruction value, and the feedback control is performed so that the difference may become small.

15 It is possible to confirm by disconnecting the terminal of the throttle opening sensor for detecting the actual opening of the throttle valve, and being not able to do the feedback control in case that the above-mentioned technology is executed.

20 The amount of supply capability of the motor for the temperature change of the motor can be compensated even if the actual opening of the throttle valve is not input when the technology according to the above-mentioned embodiment is executed.

Even if the signal from the throttle opening sensor consequentially is cut off, the compensation operation is maintained against the change in the impedance of the motor due to the change in the temperature of the motor and the power-supply voltage in this embodiment.

POSSIBILITY FOR INDUSTRIAL USE

The present invention can be applied to a throttle valve controller which drives the throttle valve of the automobile by using the motor. Further, the present invention can be used for the control of the automobile, and for the control of a general motor.

CLAIMS:

1. A method of controlling a motor driven throttle valve,
in which the opening of throttle valve is controlled by
controlling the supply capability to a motor for driving the
5 throttle valve based on the target opening and the actual
opening of throttle valve,

wherein the supply capability to said motor is corrected
according to the temperature of said motor.

10 2. The method of controlling the motor driven throttle valve
according to claim 1, wherein said supply capability to the
motor is obtained the deviation between said target opening and
the actual opening by carrying out the PID operation.

15 3. The method of controlling the motor driven throttle valve
according to claim 1, wherein the temperature of the winding
of said motor is used as the temperature of said motor.

4. The method of controlling the motor driven throttle valve
20 according to claim 1, wherein the temperature of the housing
of the motor is used as the temperature of said motor.

5. The method of controlling the motor driven throttle valve
according to claim 1, wherein the temperature of the engine

cooling water is used as the temperature of said motor.

6. A control device for a motor driven throttle valve in which the opening of the throttle valve are controlled by the motor, and the control amount of an accelerator pedal is included as one of control parameters for determining the supply capability to the motor,

wherein the throttle valve is fixed to the opening when control parameter for determining the supply capability to the motor is maintained to a constant value, and the rate of change of the supply electric current and the applied voltage to the motor with respect to time when the accelerator pedal is stepped down under such a condition is different depending on the temperature of the motor.

15

7. The control device for a motor driven throttle valve according to claim 6, wherein the temperature of the winding of said motor is used as the temperature of said motor.

8. The control device for a motor driven throttle valve according to claim 6, wherein the temperature of the housing of the motor is used as the temperature of said motor.

9. The control device for a motor driven throttle valve

according to claim 6, wherein the temperature of the engine cooling water is used as the temperature of said motor.

10. A control device for a motor driven throttle valve in which
5 the open and close of a throttle valve are controlled by a motor driven according to opening instruction signal of the throttle valve, said control instruction signal is corrected by performing the feedback of the output of the opening sensor for detecting said throttle valve opening,

10 wherein a specific value of said control instruction signal is different according to the temperature condition of said motor, when the specific value is provided as said control instruction signal with the feedback of the output of said throttle opening sensor invalidated.

15 11. A method of measuring the temperature of a throttle valve driving motor including a sensor for measuring the electric current which flows in the motor for driving the throttle valve,

20 wherein the temperature of said motor is estimated based on the voltage applied to said motor and the current value measured by said sensor when within the range of a fixed time period and the opening of the throttle valve is within a fixed range.

12. A method of measuring the temperature of a throttle valve driving motor including a sensor for measuring the electric current which flows in the motor for driving the throttle valve,

wherein the temperature of said motor is estimated based
5 on the voltage applied to said motor and the current which flows in the motor when the opening of said throttle valve is controlled to be mechanically fully closed or opened.

13. A method of measuring the temperature of a motor,

10 wherein the temperature of said motor is estimated based on the voltage applied to said motor and the current which flows in said motor.

14. A method of measuring the temperature of a throttle valve
15 driving motor of an automobile,

wherein the temperature of said motor is estimated based on the voltage applied to said motor and the current which flows in said motor when said automobile is driven at the fuel cut when decelerating.

20 15. A control device for a motor driven throttle valve in which the opening of the throttle valve is controlled by the motor,

further comprising a compensator for compensating the supply capability so that the opening of the throttle valve can

not change even if the impedance of said motor winding and/or the temperature of said motor change with control parameters for determining the supply capability to said motor being maintained to a constant value.

5

16. A control device for a motor driven throttle valve in which the opening of the throttle valve is controlled by the motor, further comprising a compensator for compensating the supply capability so that the opening of the throttle valve can be maintained at the same opening even if another resistor is added to the energizing circuit of said motor with control parameters for determining the supply capability to said motor being maintained to a constant value.

17. A control device for a motor driven throttle valve, comprising a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

wherein said microcomputer has a compensator for compensating the supply capability so that the opening of the throttle valve can not change even if the impedance of said motor winding and/or the temperature of said motor change with control

parameters input to said microcomputer being maintained to a constant value.

18. A control device for a motor driven throttle valve,
5 comprising a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

10 wherein said microcomputer has a compensator for compensating the supply capability so that the opening of the throttle valve can be maintained at the same opening even if another resistor is added to the energizing circuit of said motor with control parameters input to said microcomputer and
15 the temperature of said motor being maintained to a constant value.

19. An automobile provided with a control device for a motor driven throttle valve, in which the opening of the throttle
20 valve are controlled by the motor, and the engine speed changes according to the opening of said throttle valve,

wherein the engine speed does not change even if the impedance of said motor winding and/or the temperature of said motor change with control parameters for determining the supply

capability to said motor being maintained to a constant value.

20. An automobile provided with a control device for a motor driven throttle valve including an air flow sensor for detecting
5 the air flow amount which changes according to the opening of the throttle valve, in which the opening of the throttle valve are controlled by the motor,

wherein the output of said air flow sensor does not change even if the impedance of said motor winding and/or the
10 temperature of said motor change with control parameters for determining the supply capability to said motor being maintained to a constant value.

21. An automobile comprising an engine speed sensor for
15 detecting engine speed, a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

20 wherein the output of said engine speed sensor does not change even if the impedance of said motor winding and/or the temperature of said motor change with control parameters input to said microcomputer being maintained to a constant value.

22. An automobile comprising an engine speed sensor for detecting engine speed, a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive
 5 circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

wherein the output of said air flow sensor does not change even if the impedance of said motor winding and/or the temperature of said motor change with control parameters for
 10 determining the supply capability to said motor being maintained to a constant value.

23. An automobile in which the opening of the throttle valve are controlled by the motor, and the engine speed changes
 15 according to the opening of said throttle valve,

wherein the engine speed does not change even if another resistance is added to the energizing circuit of said motor with control parameters for determining the supply capability to said motor being maintained to a constant value.

24. An automobile including an air flow sensor for detecting the air flow amount which changes according to the opening of the throttle valve, in which the opening of the throttle valve are controlled by the motor, and the engine speed changes

according to the opening of said throttle valve,

wherein the output of said air flow sensor does not change even if another resistance is added to the energizing circuit of said motor with control parameters for determining the supply capability to said motor being maintained to a constant value.

25. An automobile comprising an engine speed sensor for detecting engine speed, a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

wherein the output of said engine speed sensor does not change even if another resistor is added to the energizing circuit of said motor with control parameters input to said microcomputer being maintained to a constant value.

26. An automobile comprising an air flow sensor for detecting the air flow amount supplied to an engine, a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

wherein the output of said air flow sensor does not change even if another resistor is added to the energizing circuit of said motor with control parameters for determining the supply capability to said motor being maintained to a constant value.

5

27. A control method for a motor driven throttle valve in which the opening of the throttle valve is controlled by the motor,

wherein supply capability to said motor increases as the temperature of said motor increases with control parameters for determining the supply capability to said motor being maintained to a constant value.

10

28. A control method for a motor driven throttle valve including an air flow sensor for detecting the air flow amount which changes according to the opening of the throttle valve, in which the opening of the throttle valve is controlled by the motor,

15

wherein supply capability to said motor increases only by the amount necessary to keep the output of said air flow sensor constant as the temperature of said motor increases with control parameters for determining the supply capability to said motor being maintained to a constant value.

20

29. A control method for an automobile provided with a motor

driven throttle valve controller comprising an engine speed sensor for detecting engine speed, a throttle valve for controlling the air flow amount supplied to an engine, a microcomputer, a motor for driving said throttle valve to open
5 and close, and a drive circuit for inputting a signal from said microcomputer and controlling the state of energizing of said motor,

wherein the supply capability to said motor increases as the temperature of said motor rises so that the output of the
10 engine speed sensor may not change with control parameters input to said microcomputer being maintained to a constant value.

ABSTRACT

A method is provided for easily avoiding undesirable effects on various physical values due to the change in temperature of a motor for driving a throttle valve without causing secondary problems. A technique is also provided for measuring the temperature of the motor electrically. The method uses a compensation device for correcting the power supply to the motor by detecting the impedance of the motor windings and/or the change in the motor temperature. The temperature of the motor is estimated from the current and voltage to the motor.

104867 51525

FIG. 1(a)

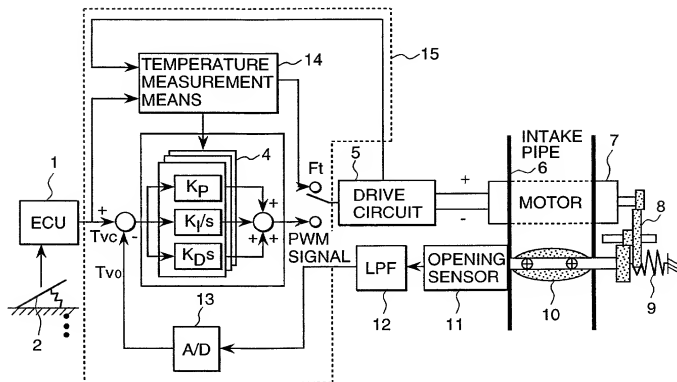


FIG. 1(b)





FIG. 1(c)



2 / 11

FIG. 2

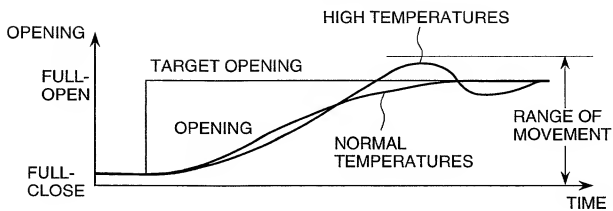


FIG. 3




FIG. 6

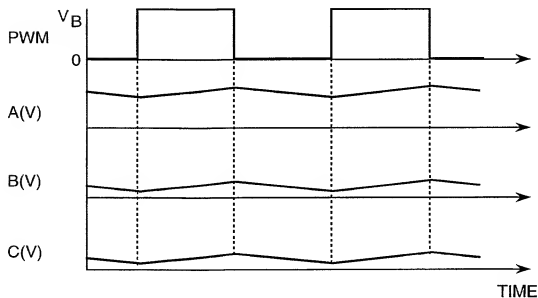


FIG. 4

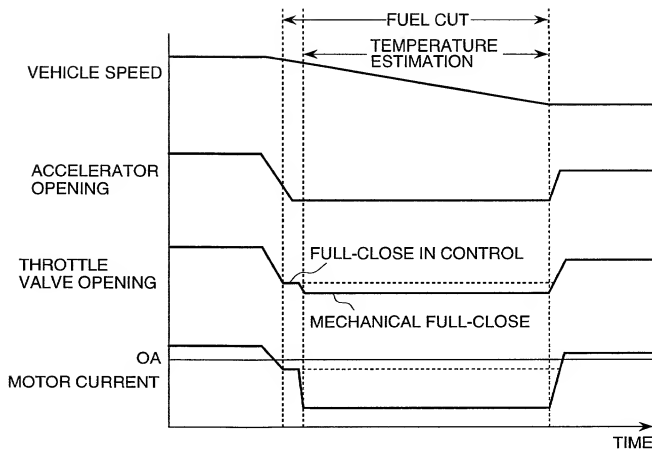


FIG. 5

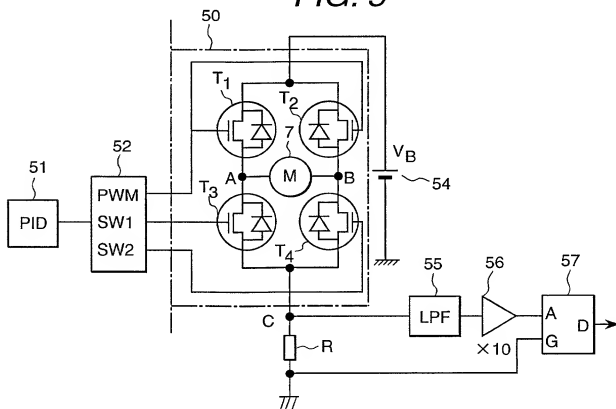


FIG. 7

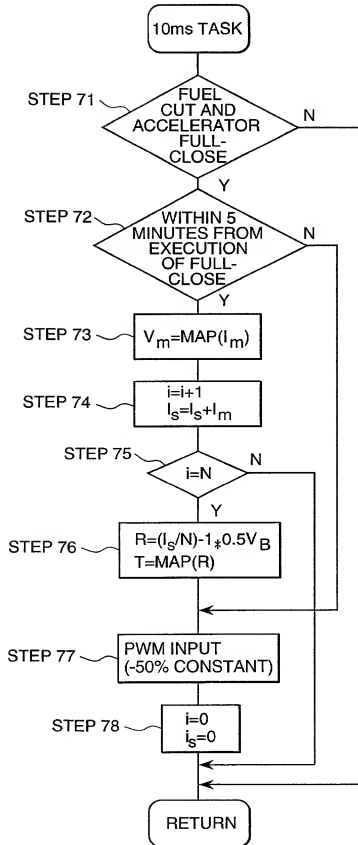


FIG. 8(a)

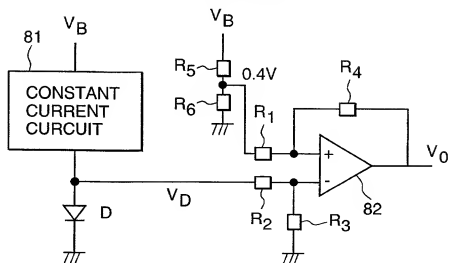


FIG. 8(b)




FIG. 8(c)




FIG. 9(a)

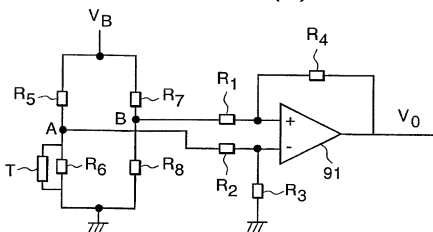


FIG. 9(b)

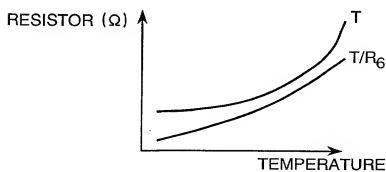


FIG. 9(c)




FIG. 10

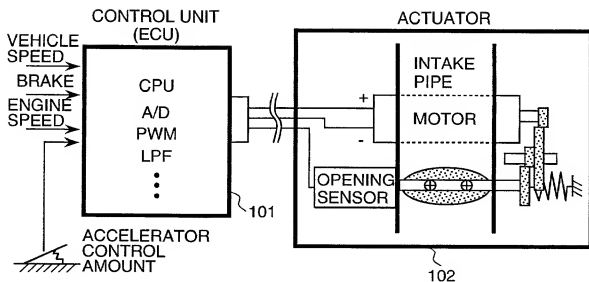


FIG. 11


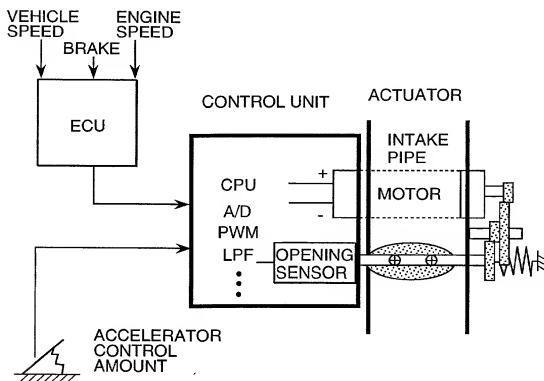


FIG. 12




TARGET
OPENING
COMMAND FO
THROTTLE =
VALVE FROM
ECU

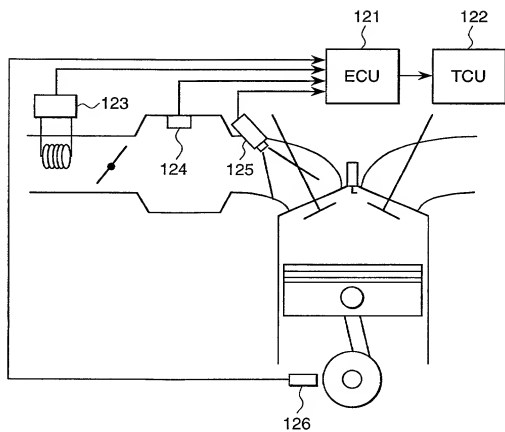

F007907



FIG. 15

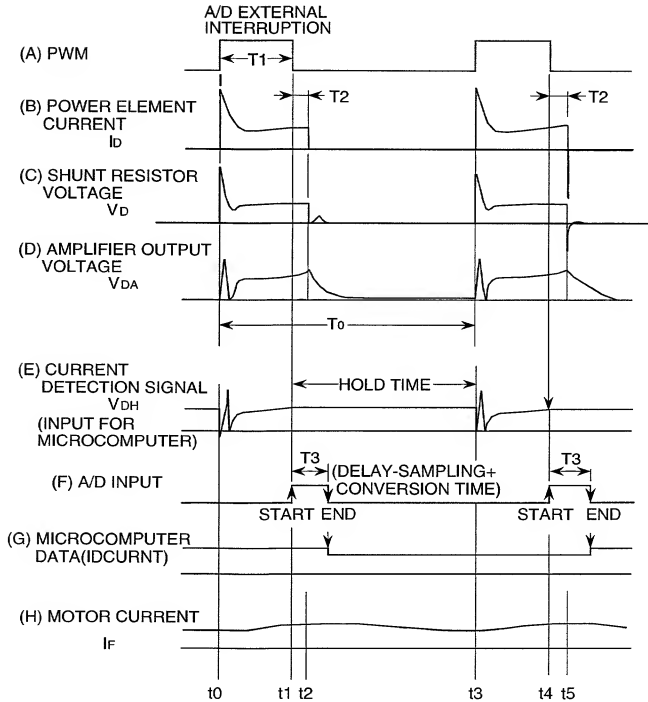

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書籍、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR CONTROLLING
MOTOR-DRIVEN THROTTLE VALVE, AUTOMOBILE, METHOD
OF MEASURING TEMPERATURE OF MOTOR FOR
DRIVING AUTOMOTIVE THROTTLE VALVE, AND METHOD
OF MEASURING MOTOR TEMPERATURE

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☒ was filed on July 28, 1999
as United States Application Number or
PCT International Application Number
PCT/JP99/04060 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

Prior Foreign Application(s)

外国での先行出願

(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとき宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)
(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Martin Fleit, Reg. No. 16,900; Herbert I. Cantor, Reg. No. 24,392;
James F. McKeown, Reg. No. 25,406; Donald D. Evenson, Reg. No. 26,160; Joseph D. Evans, Reg. No. 26,269; Gary R. Edwards, Reg. No. 31,824; Jeffrey D. Sanok, Reg. No. 32,169; Richard R. Diefendorf, Reg. No. 32,390; and Paul A. Schnose, Reg. No. 39,361

書類送付先

Send Correspondence to:

Crowell & Moring LLP

The Evenson, McKeown, Edwards & Lenehan

Intellectual Property Law Group

1001 Pennsylvania Avenue, N.W., Washington, D.C. 20004-2595

直接電話連絡先: (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (202)628-8800

Fax: (202)628-8844

唯一または第一発明者	Full name of sole or first inventor <u>Masatoshi HOSHINO</u>
発明者の署名	Inventor's signature <u>Masatoshi Hoshino</u>
日付	Date <u>12/3/2001</u>
住所	Residence <u>Tsuchiura, Japan</u>
国籍	Citizenship <u>Japan</u>
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第二共同発明者	Full name of second joint inventor, if any <u>Katsuji MARUMOTO</u>
第二共同発明者の署名 日付	Second inventor's signature Date <u>Katsuji Marumoto</u> <u>12/4/2001</u>
住所	Residence <u>Hitachi, Japan</u> <u>JPX</u>
国籍	Citizenship <u>Japan</u>
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第三共同発明者	Full name of third joint inventor, if any <u>Minoru OOSUGA</u>
第三共同発明者の署名 日付	Third inventor's signature Date <u>Minoru Oosuga</u> <u>12/4/2001</u>
住所	Residence <u>Hitachinaka, Japan</u> <u>JPX</u>
国籍	Citizenship <u>Japan</u>
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第四共同発明者	Full name of fourth joint inventor, if any <u>Yasuhiro KAMIMURA</u>
第四共同発明者の署名 日付	Fourth inventor's signature Date <u>Yasuhiro Kamimura</u> <u>12/11/2001</u>
住所	Residence <u>Hitachinaka, Japan</u> <u>JPX</u>
国籍	Citizenship <u>Japan</u>
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第五共同発明者	Full name of fifth joint inventor, if any <u>Yasushi SASAKI</u>
第五共同発明者の署名 日付	Fifth inventor's signature Date <u>Yasushi Sasaki</u> <u>12/11/2001</u>
住所	Residence <u>Utsunomiya-machi, Japan</u> <u>JPX</u>
国籍	Citizenship <u>Japan</u>
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第六以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for sixth and subsequent joint inventors.)